Technical Data Sheet

PA1003



Description


- PA1003 is a nylon-based dielectric absorber.
- Designed for attenuation in the +10 GHz range.
- This product line is designed to make rigid parts requiring mechanical properties.
- PA1003 has been impact modified to provide toughness and impact resistance.
- Ideally suited to be molded into a connector, housing, or circuit cover.
- Performance can be tailored to specific applications.
- Halogen free, RoHS and REACH compliant.

<u>Properties</u>	Test Method	<u>Value</u>
Durometer	ASTM D2240	75 Shore D
Tensile Strength	ASTM D638	5980 psi
Elongation	ASTM D638	24%
Surface Resistivity	ASTM D257	20 MΩ/□
Color		Black

Attenuation

-80 -90 -100 -110 -120 -130 -140 -150 -160 100 75 80 85 90 95 105 110 Frequency (GHz)

Electric Loss Tangent (E"/E')

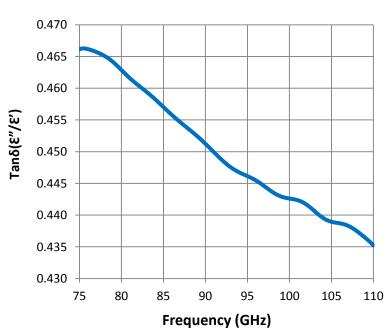

Note: the information provided is accurate at time of publication. It is the responsibility of the end-user to confirm compliance to their application. All test data is typical.

