

Technical Data Sheet

RT-10002



Description

- Flexible, low density, high loss, carbon impregnated reticulated foam.
- Available with pressure sensitive adhesive (PSA).
- Can be water-jet cut for custom configurations.
- RoHS and REACH compliant.


Physical Properties

<u>Properties</u>	<u>Value</u>
Sheet Thickness	0.75" (1.91 cm)
Standard Sheet Size	24" x 24" (60.96 x 60.96 cm) Other sheet sizes available upon request.
Color	Black

Electrical Properties

<u>Frequency</u>	<u>Typical Reflection Loss</u>
8-18 GHz	≤ -14 dB

Reflection Loss

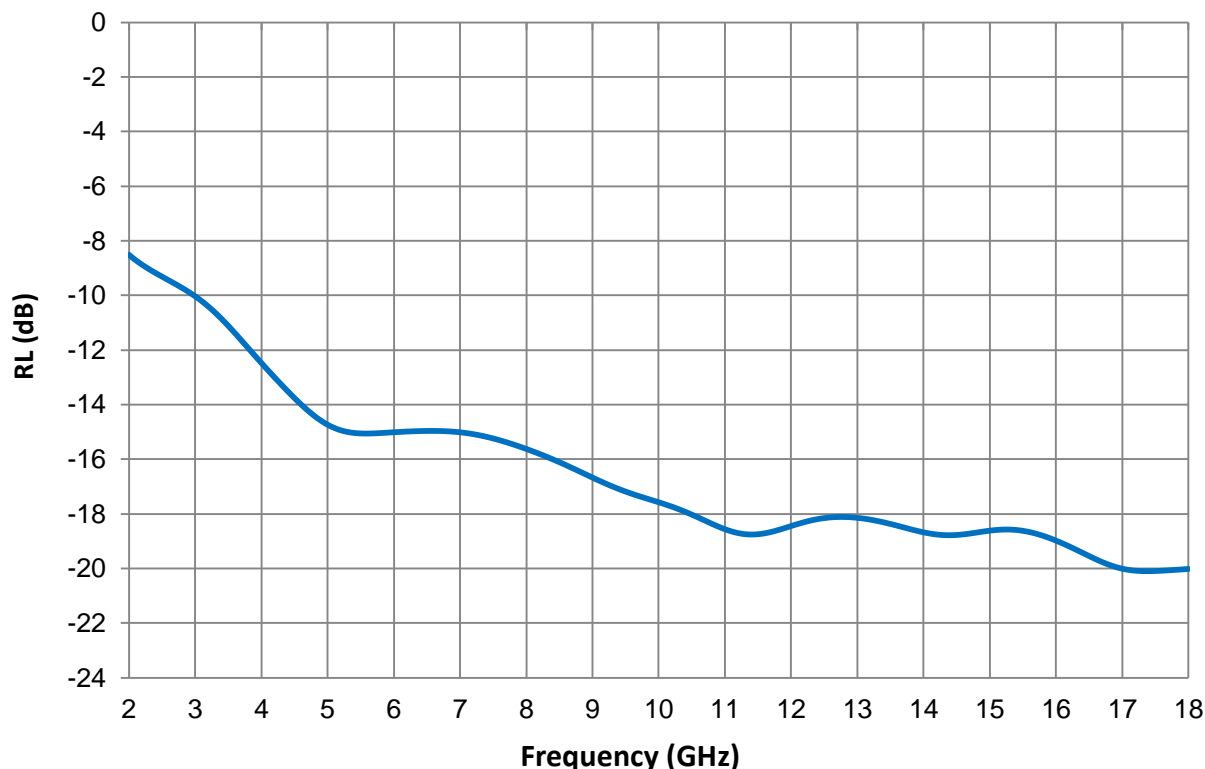

Note: the information provided is accurate at time of publication. It is the responsibility of the end-user to confirm compliance to their application. All test data is typical.